

Anti vandal switch ϕ 12mm




- Anti-Vandal IK09/ Sealed IP65
- 1,000,000 Cycles Momentary
- Variety Of Colors

ORDER CODE

Series	Actuator Options	Terminal Options	Function Options	Material Options	Actuator Color Options
V12	B- Round	P- Solder lug(2.0x0.5) NONE- Screw	NONE- Momentary 1NO	S- Stainless steel N- Nickel plated brass A- Zn-Al alloy black color	W- White Y- Yellow B- Blue G- Green R- Red BK- Black

DESCRIPTION

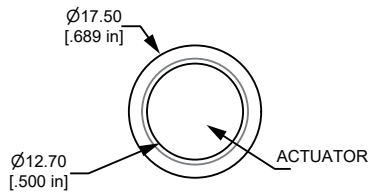

Panel Thickness: 1~4.0mm

TECHNICAL DATA






Type	V12-B-S	V12-B-N	V12-B-A
Illuminated Options	Non-illuminated		
Front Shape	Round		
Terminal	Screw/ Solder (2.0X0.5)		
Max. Switch Rating	2A 48VDC		
Contact Resistance	$\leq 50m\Omega$		
Insulation Resistance	$\geq 1000m\Omega$		
Dielectric Strength	2000VAC		
Operation Temp.	$-20^{\circ}C \sim +55^{\circ}C$		
Mechanical Life	1,000,000 Cycles		
Electrical Life	200,000 Cycles		
Contact Material	Silver Alloy		
Torque	5 ~ 14Nm		
Operation Pressure	approx. 3.5N		
Protection	IP65/ IK08		
Material			
Actuator	Stainless Steel/ Brass/ PBT		
Body	Stainless Steel	Nickel plated brass	Zin-Al Alloy
Base	PBT		
Color	R G Y O B W BK		

APPLICATIONS / MARKETS



Anti vandal switch $\phi 12\text{mm}$

SOLDER TERMINAL

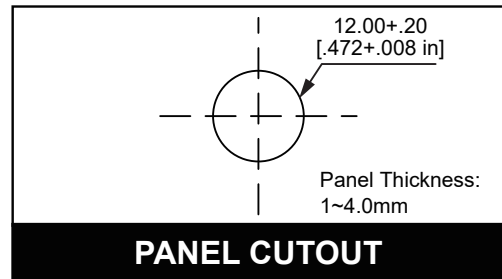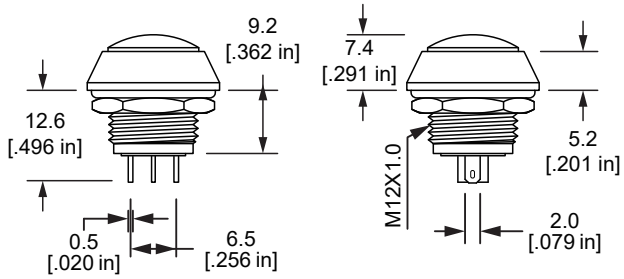

SCREW TERMINAL

